

Function: Triple Level Trip Amplifier from a single process signal input. The trip action can be arranged so that the Alarm condition can be above (High Trip) or below (Low Trip) each of the set points, and that the relays can be either normally energised to de-energise in the Alarm condition (Fail-Safe), or normally de-energised to energise in the Alarm condition (Non Fail-Safe). Options: The BD130 can be configured for a 2 input Adder, Subtractor or Averages on mA or Voltage inputs. 4 to 20mA input versions can have Upscale Drive on loss of input and the BD130 can be fitted with a Variable Trip Differential per channel.



SPECIFICATIONS

Please note that the following are typical ranges. Other ranges available, please contact sales office.

INPUTS:

D C Current

Standard Ranges
0 to 10mA into 100 ohms
4 to 20mA into 62 ohms
Optional Ranges
0 to 1mA into 100 ohms
0 to 10mA into 10 ohms
4 to 20mA into 10 ohms

Option: Upscale drive on loss of 4 to 20mA input signal

Other current inputs as required
Minimum current 10µA,
Maximum current 100mA

D C Voltage

Between -250 to +250 Volt DC
Minimum voltage span 5mV
Maximum voltage span 500V

A C Current

0 to 1A

A C Voltage

0 to 250 V

Input Impedance

1M ohms or greater

Resistance (2 wire)

Between 0 and 20K ohms
Minimum span 5 ohms
Maximum span 20K ohms

Potentiometers (3 wire)

Between 0 and 10K ohms
Minimum span 10 ohms
Maximum span 10K ohms

Resistance Thermometers

2 or 3 wire, 100 ohms at 0°C or 130 ohms at 0°C
Measurable range, -200°C to +800°C
Minimum temperature span 10°C
Maximum temperature span 600°C
Input is linearised

Thermocouples

Type B, E, J, K, N, R, S & T
Temperatures covered:

| Type | Range | Min Temp | Change |
|------|----------------|----------|--------|
| E | 600 to 1800°C | 400°C | |
| B | -260 to 1000°C | 65°C | |
| J | -200 to 1200°C | 80°C | |
| K | -260 to 1370°C | 100°C | |
| N | 0 to 1300°C | 150°C | |
| R | 50 to 1760°C | 400°C | |
| S | 80 to 1760°C | 400°C | |
| T | -260 to 400°C | 100°C | |

Automatic cold junction compensation
Open circuit thermocouple monitoring upscale or downscale drive

Transducer Power Supply

Unregulated nominal 24 Volt
DC 25mA maximum

OUTPUTS:

Relay - Contacts

Three SPCO relay contacts - one per level

Response Time

30mS or better

Contact Ratings

Maximum current 2A
Maximum voltage 250V AC
Maximum voltage 24 Volt DC

Switching Differential

0.5% of span approx

Switching Mode

Relay energises or de-energises on rising or falling signal as required

Set Point

270° screw driver operated potentiometer through front panel

Relay State Indication

Bi-colour red/green LED
Green = Stable State
Red = Alarm State

SUPPLY:

Power Supply

115/230 Volt AC±15%
50/60 Hz
(Wire to the required terminals)

Power Required

2.5 Watts Maximum

GENERAL:

Temperature Coefficient

±0.1% of span/ Δ10°C
(for inputs > 100mV)
+ Cold junction error, for thermocouple inputs

Operating Temperature Range

0 to +50°C

Storage Temperature Range

-20 to +60°C


Operating / Storage Humidity Range

0 to 95% RH non-condensing

Weight

290 gms

MECHANICAL DETAILS

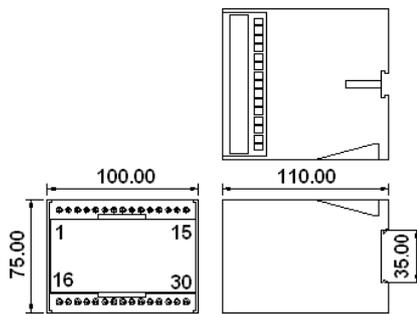

| Inputs | AC Current | AC Volts | DC mA | DC mV/V | T/Cs | 2 Wire Slidewire | 3 Wire Pot | Resistance Thermometer | Dual Input |
|-------------------------------|------------|----------|--------|---------|------|------------------|--------------------------|------------------------|------------|
| 1 | ~ | ~ | -ve | -ve | -ve | 0% | 0% | | B+ |
| 2 | ~ | ~ | +ve | +ve | +ve | 100% | Wiper | | A+ |
| 3 | | | | | | | 100% | | Common |
| 4 | | | | | | | | | |
| Transducer Power Supply -ve | | | | | | 22 | Relay N/O | | |
| 5 Transducer Power Supply +ve | | | | | | 23 | Common Trip 3 | | |
| 6 to 15 - Unused | | | | | | 24 | Relay N/C | | |
| 16 | | | | | | 25 | Unused | | |
| 17 | | | Trip 1 | | | 26 | Unused | | |
| 18 | | | | | | 27 | Unused | | |
| 19 | | | Trip 2 | | | 28 | Power Supply 230 Volt AC | | |
| 20 | | | | | | 29 | Power Supply 115 Volt AC | | |
| 21 | | | | | | 30 | Power Supply Neutral | | |

ORDERING DETAILS

- Give identification code, i.e. BD130
- Give power supply voltage, i.e. 230 Volt AC 50/60 Hz
- Give details of input signal, i.e. input type (as listed above) and range. If thermocouple input please specify upscale or downscale drive for open circuit protection
- Give details of Options required: For thermocouple input please specify upscale or downscale drive for open circuit protection. For 4 to 20mA input, please specify if upscale drive required on loss of input signal.
- Give details of trip action required, i.e. HHLFS

For each setpoint:

- H = High Trip = Alarm condition above the set point
 - L = Low Trip = Alarm condition below the set point
- and for the operation of the relays:
- FS = Fail Safe = Relays normally energised to de-energise in the alarm condition
 - NF = Non Fail Safe = Relays normally de-energised to energise in the alarm condition

